




T.C.T Panel Sizing Saw Blade

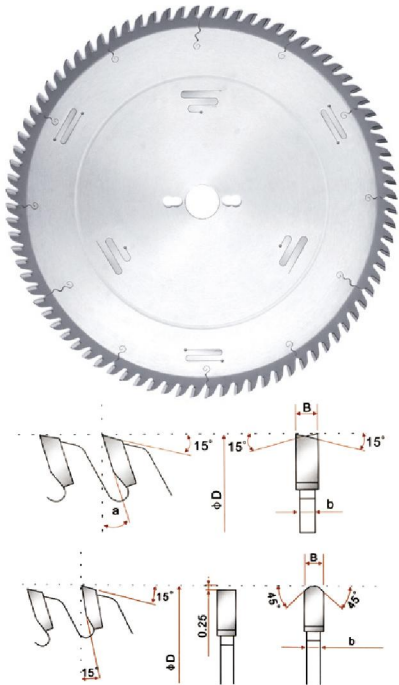


Tooth Model: ATB / TCG

Application: Chipboard, MDF, melamine, Aluminum.

Characters: This kind of saw blade is suitable for hard laminated chipboard panels, HDF, Multi-panels. If for cutting laminated boards, need to together with scoring saw blade.

Diameter (mm)	Thick (mm)	Kerf (mm)	Hole (mm)	Teeth
300	3.0	4.4	65	60
300	3.0	4.4	75	60
300	3.0	4.4	80	72
300	3.0	4.4	80	96
350	3.0	4.4	60	72
350	3.0	4.4	75	72
350	3.0	4.4	60	84
350	3.0	4.4	80	96
380	3.0	4.4	60	72
380	3.5	4.8	60	72
380	3.5	4.8	60	84
400	3.0	4.4	75	72
400	3.5	4.8	80	72
400	3.0	4.4	75	96
400	3.5	4.8	60	84
430	3.0	4.4	75	72
430	3.5	4.8	60	84
450	3.0	4.4	60	72
450	3.5	4.8	60	72
450	3.5	4.8	60	84
450	3.5	4.8	80	84
450	3.5	4.8	60	96
450	3.5	4.8	80	96
480	3.5	4.8	80	84
480	3.5	4.8	80	96
500	3.5	4.8	60	72
500	3.5	4.8	75	84
500	3.5	4.8	80	96

T.C.T Panel Sizing Scoring Saw Blade

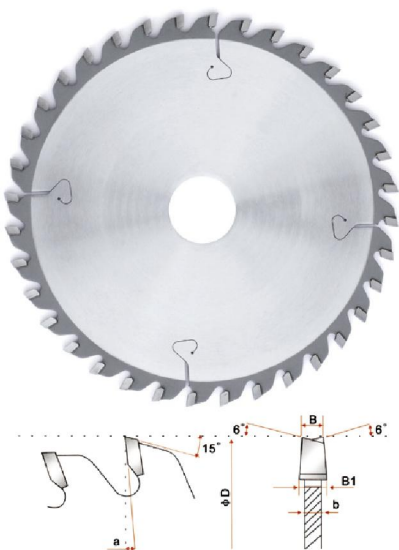

Tooth Model: KON / ATB

Application: Chipboard, MDF, melamine, Aluminum.


Characters: To score the coating on laminated panels, the scoring width can be adjusted by the spindle.

Diameter (mm)	Thick (mm)	Kerf (mm)	Hole (mm)	Teeth
125	3.0	4.3-5.3	20/45	24
125	3.0	4.6-5.6	20/45	24
150	3.0	4.3-5.3	25.4/45	36
150	3.0	4.3-5.3	25.4/45	40
150	3.0	4.6-5.6	25.4/45	36
150	3.0	4.6-5.6	25.4/45	40
160	3.0	4.3-5.3	45	36
160	3.0	4.3-5.3	55	36
160	3.0	4.3-5.3	60	36
160	3.0	4.3-5.3	45/60	40
160	3.0	4.6-5.6	45/55	36
180	3.0	4.3-5.3	30/50	36
180	3.0	4.3-5.3	30/50	40
180	3.0	4.6-5.6	45/55	36
200	3.0	4.3-5.3	20/22	36
200	3.0	4.3-5.3	30/45	36
200	3.0	4.3-5.3	20/80	40
200	3.0	4.6-5.6	20/65	36
300	3.0	4.3-5.3	25.4/50	48
300	3.0	4.3-5.3	65/80	60
300	3.0	4.3-5.3	65/80	72

* OTHER SPECIFICATIONS ARE AVAILABLE UPON REQUEST.




T.C.T Ripping Saw Blades with Rakers

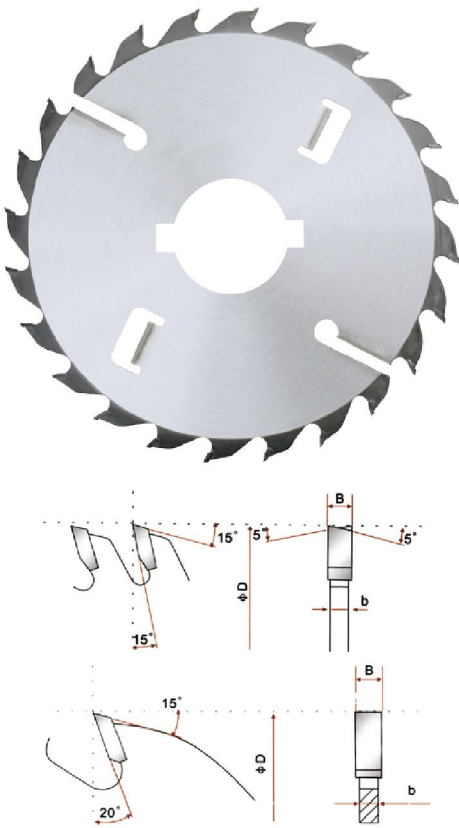

Diameter (mm)	Thick (mm)	Kerf (mm)	Hole (mm)	Teeth
200	1.6	2.2	30/70	16+4
200	2.0	2.8	30/70	16+4
230	1.6	2.2	30/70	20+4
230	2.0	2.8	30/70	20+4
230	1.8	2.4	30/70	30+4
250	1.8	2.4	30/70	20+4
250	2.2	3.2	30/70	20+4
250	1.8	2.4	30/70	24+4
250	2.2	3.2	30/70	24+4
250	1.8	2.5	30/70	30+4
300	1.8	2.5	30/70	24+4
300	2.2	3.2	30/70	24+4
300	1.8	2.4	30/70	30+4
305	1.9	2.6	30/70	36+4
305	2.2	3.2	30/70	36+4
350	2.2	3.2	30/70	24+4
350	2.5	3.5	30/70	24+4
350	2.5	3.5	30/70	28+6
350	3.0	4.5	30/70	32+4
350	2.2	3.0	30/70	40+6
400	3.0	4.0	30/70	28+6
400	3.0	4.0	30/70	36+6
450	3.0	4.2	30/70	30+6
450	3.0	4.0	30/70	48+6
500	3.5	4.8	30/70	48+6


Tooth Model: ATB / FT **Application:** Hard and wet wood cutting.
Characters: Suitable for thick, higher humidity wood cross cutting. The containing of water should less than 15%. Thin saw blade will do less material waste, but the containing of water should less than 10%.

T.C.T Saw Blade for Grooving

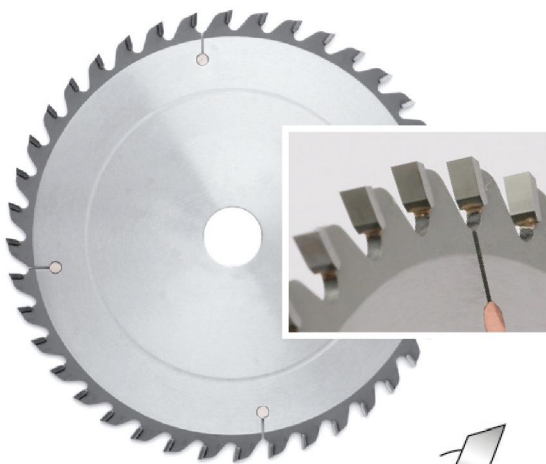

Diameter (mm)	Thick (mm)	Kerf (mm)	Hole (mm)	Teeth
80	1.0-4.0	1.5-5.0	20/30	12-30
100	1.0-4.5	1.5-6.0	20/30	20-36
125	2.0-8.0	3.0-10.0	20/30	20-40
150	2.0-8.0	3.0-10.0	25.4/30	20-40
160	2.0-8.0	3.0-10.0	25.4/30	20-40
180	2.0-8.0	3.0-10.0	25.4/30	24-48
200	2.0-8.0	3.0-10.0	25.4/30	24-60
250	2.0-8.0	3.0-10.0	25.4/30	24-60
300	2.0-8.0	3.0-10.0	25.4/30	28-72

Tooth Model: KON / ATB
Application: For the sharpen of wood and bottom scoring.
Characters: Wood scoring, grooving, the teeth patterns will be designed according to the requirements of teeth bottom.

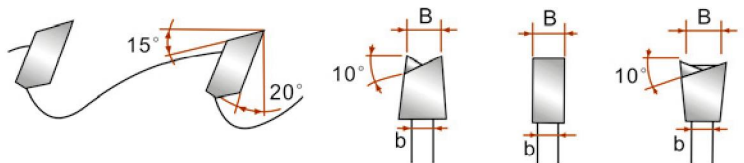


* OTHER SPECIFICATIONS ARE AVAILABLE UPON REQUEST.



T.C.T Saw Blade to Cut Laminated Panels



Diameter (mm)	Thick (mm)	Kerf (mm)	Hole (mm)	Teeth
200	2.2	3.2	30	48
250	2.2	3.2	30	60
300	2.2	3.2	30	60
350	2.5	3.5	30	72
400	2.5	3.5	30	80
250	2.2	3.2	30	80
300	2.2	3.2	30	72
300	2.2	3.2	30	96
350	2.5	3.5	30	84
350	2.5	3.5	30	96
350	2.5	3.5	30	108
400	2.5	3.5	30	96
400	2.5	3.5	30	120



Tooth Model: ATB / TCG

Application: Chipboard, MDF, Melamine, Aluminum.


Characters: This kind of products is suitable for cutting laminated chipboard, MDF, multiboard with the thickness of less than 35mm. If for cutting laminated materials, need to together with scoring saw blade.



T.C.T Saw Blades to Cut Plywood



Diameter (mm)	Thick (mm)	Kerf (mm)	Hole (mm)	Teeth
200	2.2	3.2	25.4	60
230	2.2	3.2	25.4	80
250	2.2	3.2	25.4	80
250	2.2	3.2	25.4	100
250	2.2	3.2	25.4	120
280	2.2	3.2	25.4/30	120
300	2.2	3.2	25.4/30	100
300	2.2	3.2	25.4/30	120

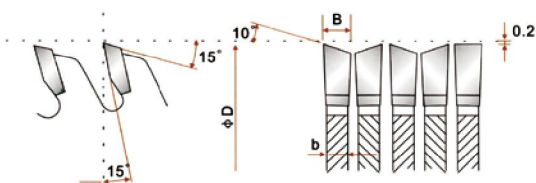

Tooth Model: ATB / FT


Application: Plywood, multi-panels.

Characters: Used in plywood cutting, multi-panels which have much glues.

* OTHER SPECIFICATIONS ARE AVAILABLE UPON REQUEST.



T.C.T Conical Scoring Saw Blade

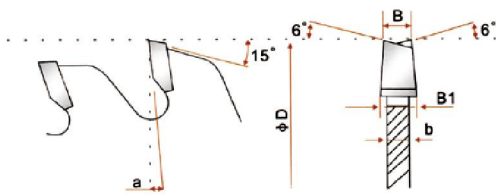


Diameter (mm)	Thick (mm)	Kerf (mm)	Hole (mm)	Teeth
100	2.2	2.8-4.0	20/22	24
100	2.2	3.1-4.1	20/22	24
120	2.2	2.8-4.0	20/22	24
120	2.2	3.1-4.1	20/22	24
120	2.2	3.3-4.3	20/22	24
125	2.2	3.1-4.1	20/22	24
125	2.2	3.3-4.3	20/45	24
150	2.2	3.1-4.1	25.4/45	36
150	2.2	3.1-4.1	25.4/45	40
150	2.2	3.3-4.3	25.4/45	36
150	2.2	3.3-4.3	25.4/45	40
160	2.2	3.1-4.1	20/30	36
160	2.2	3.1-4.1	20/30	40
160	2.2	3.3-4.3	25.4/30	36
160	2.2	3.3-4.3	25.4/30	40
180	2.2	3.1-4.1	20/30	36
180	2.2	3.1-4.1	20/30	40
180	2.2	3.3-4.3	25.4/30	36
180	2.2	3.3-4.3	25.4/30	40

Tooth Model: KON / ATB

Application: To score the coating on laminated panels.

Characters: To score the coating on laminated panels, the scoring width can be adjusted by the spindle.

T.C.T Adjustable Scoring Saw Blade

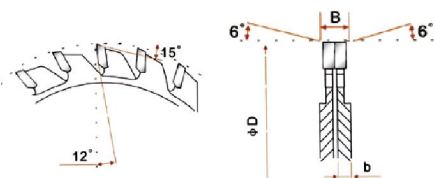

Diameter (mm)	Thick (mm)	Kerf (mm)	Hole (mm)	Teeth
80	2.0	2.8-3.6	20	10+10
100	2.0	2.8-3.6	20	12+12
100	2.0	2.8-3.6	22	12+12
120	2.0	2.8-3.6	20	12+12
120	2.0	2.8-3.6	22	12+12
125	2.0	2.8-3.6	20	12+12
125	2.0	2.8-3.6	22	12+12
160	2.5	4.0-5.2	20/60	20+20
180	2.5	4.0-5.2	20/45	20+20
200	2.5	4.0-5.2	20/50	24+24

Tooth Model: FT


Application: To score the coating on laminated panels.

Characters: Used for the scoring of laminated, the scoring width can be adjusted by spacers. The best width can reach less than 2mm.

** OTHER SPECIFICATIONS ARE AVAILABLE UPON REQUEST.*



Ordinary Circular Saw Blades for Aluminum

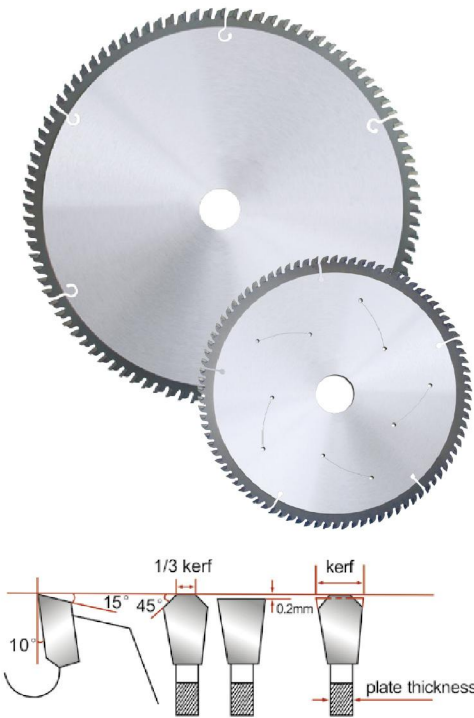


Inch	Diameter (mm)	Thick (mm)	Kerf (mm)	Hole (mm)	Teeth
4"	110	1.2	1.8	20	40T
5"	125	1.2	1.8	20	40T
6"	150	1.3	2.0	20/25.4	60T
7"	180	1.3	2.2	20/25.4	60T
7"	180	1.3	2.2	20/25.4	80T
8"	200	1.5	2.2	20/25.4	80T
8"	200	1.5	2.2	20/25.4	100T
9"	230	1.6	2.3	20/25.4	80T
9"	230	1.6	2.3	20/25.4	100T
10"	250	2.0	3.0	20/25.4	80T
10"	250	2.0	3.0	20/25.4	100T
10"	250	2.0	3.0	20/25.4	120T
12"	300	2.0	3.0	25.4/30	80T
12"	300	2.0	3.0	25.4/30	100T
12"	300	2.0	3.0	25.4/30	120T
14"	350	2.2	3.2	25.4/30	100T
14"	350	2.2	3.2	25.4/30	120T
16"	400	2.5	3.5	25.4/30	100T
16"	400	2.5	3.5	25.4/30	120T
18"	450	3.0	3.5	25.4/30	100T
18"	450	3.0	3.5	25.4/30	120T
20"	500	3.0	3.8	25.4/30	100T
20"	500	3.0	3.8	25.4/30	120T

Tooth Model: TCG,FT

Application: for cutting aluminum blade/stick which the thickness less than 1/3 diameter of saw blade; and also can be used to cut plastic steel.

T.C.T Saw Blade For Non-Ferrous Metal

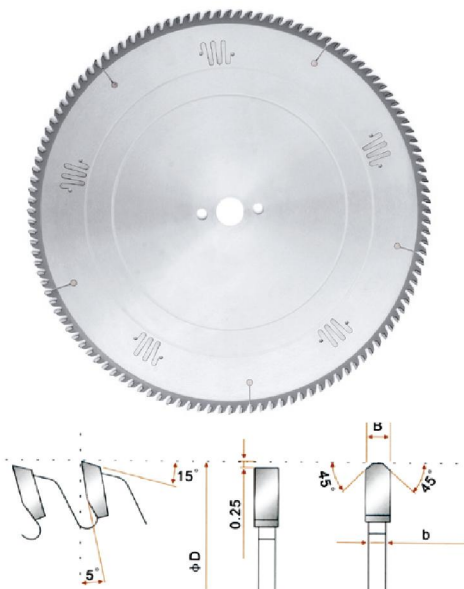

Diameter (mm)	Thick (mm)	Kerf (mm)	Hole (mm)	Teeth
205	1.4	2.0	25.4	80
205	2.2	2.8	25.4	80
205	1.4	2.0	25.4	100
205	2.2	2.8	25.4	100
250	2.4	3.0	25.4	80
250	2.0	2.6	25.4	100
250	2.4	3.0	25.4	100
250	2.0	2.6	25.4	120
250	2.4	3.0	25.4	120
300	2.0	2.6	25.4/30	100
300	2.4	3.0	25.4/30	100
350	2.4	3.0	25.4/30	100
350	3.0	3.6	25.4/30	100
400	2.4	3.0	25.4/30	100
400	3.0	3.6	25.4/30	100
400	2.4	3.0	25.4/30	120
400	3.0	3.6	25.4/30	120
450	3.0	3.6	25.4/30	120
450	3.4	4.0	25.4/30	120
500	4.0	4.6	25.4/30	100
500	4.0	4.6	25.4/30	120
550	4.0	4.8	25.4/30	120
600	4.0	4.8	25.4/30	144
700	4.0	5.2	25.4/30	144
800	5.0	6.0	25.4/30	72
800	5.0	6.0	25.4/30	160

Tooth Model: TCG

Application: Used for 45 degrees cutting of aluminum and aluminum alloy.

Characters: Suitable for the cutting of aluminum alloy materials, non-ferrous metals and some other materials with high quality and long cutting life.


* OTHER SPECIFICATIONS ARE AVAILABLE UPON REQUEST.



Cold Metal Saw




Diameter (mm)	Kerf (mm)	Hole (mm)	Teeth
250	2.0	32	54/60/72/80/100/120
285	2.0	32	60/72/80/100/120
315	2.25	32	54/60/72/80/100
360	2.6	40	60/80/100
425	2.7	50	60/80/100
460	2.7	50	60/80/100



Advantages :

1. We use high grade Cermet tips, With the most advance grinding machine(Enokida and vollmer), Our sawblade has the most stable quality.
2. Body using SKS steel (imported from Japan). Within laser cutting, the high grade body steel makes the work more easier and more stable.
3. Special tips (imported) make sure metal-cutting more stable and keep the section clear.
4. Special tension technic and special coating technic (Ti coating make sure metal-cutting more stable and ensure the using life.
5. Design for different size, shape, material cutting.

Saw Blade for Cutting Ferrous

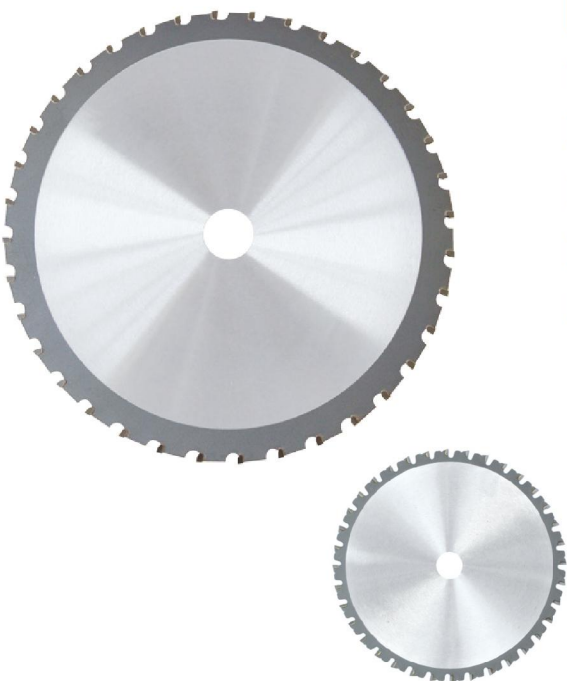

Diameter (mm)	Thick (mm)	Kerf (mm)	Hole (mm)	Teeth
100	1.2	1.6	20	22T
110	1.2	1.6	20	24T
125	1.2	1.6	20	28T
160	1.6	2.0	20	40T
180	1.6	2.0	20	36T
190	1.6	2.0	30	48T
205	1.6	2.0	25.4	48T
230	1.8	2.2	30	48T
250	2.0	2.4	30	48T
305	2.4	2.8	25.4	60T

Advantages : Cut ferrous faster, cleaner and easier. Save time, money, the environment, and your respiratory.




* OTHER SPECIFICATIONS ARE AVAILABLE UPON REQUEST.



T.C.T Saw Blade For Cutting



Diameter (mm)	Thick (mm)	Kerf (mm)	Hole (mm)	Teeth
200	1.7	2.2	25.4/30	80
200	2.5	3.0	25.4/30	80
230	1.7	2.2	25.4/30	80
230	2.5	3.0	25.4/30	80
230	1.7	2.2	25.4/30	100
230	2.5	3.0	25.4/30	100
250	1.7	2.2	25.4/30	100
250	2.5	3.0	25.4/30	100
275	2.5	3.0	25.4/30	100
300	2.0	2.5	25.4/30	100
300	2.5	3.0	25.4/30	100
300	2.0	2.5	25.4/30	120
300	2.5	3.0	25.4/30	120

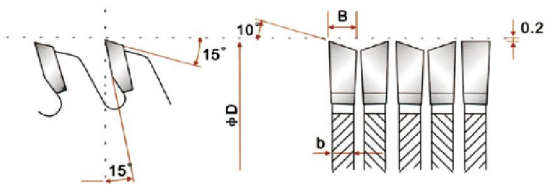


Tooth Model: ATB / FT

Application: Plywood, multi-panels, Organic glass (Plexiglas) cutting.

Character: Used in plywood cutting, multi-panels which have much glues, crafts, decorations, plexiglas cutting. High cut finishing and long cutting life.

T.C.T Saw Blade for Cutting Grass

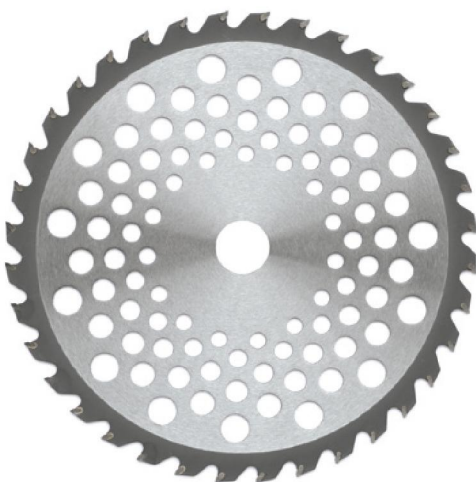


Inch	Diameter (mm)	Thick (mm)	Kerf (mm)	Hole (mm)	Teeth
9"	230	1.3	2.3	32	36T
9"	230	1.3	2.3	32	40T
10"	255	1.3	2.3	32	36T
10"	255	1.3	2.3	32	40T



Tooth Model: ATB

Application: It's designed for cutting pruning weed, branch etc.

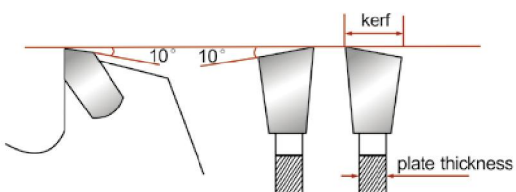

* OTHER SPECIFICATIONS ARE AVAILABLE UPON REQUEST.



JIANGSU FENGTAI TOOLS CO.,LTD.

Add: No.666,Qianjin Road, Development Zone,
Danyang city,Jiangsu Province, China.

Tel: +86-400-0266-989

Web: <http://www.fengtai.com>

E-mail: fengtai@fengtai.com